


Kan reduceras genom att böja ner rören och filtret, till ca. 45°.

Can be reduced by bending the tubes and filter-dryer aside to abt. 45°.

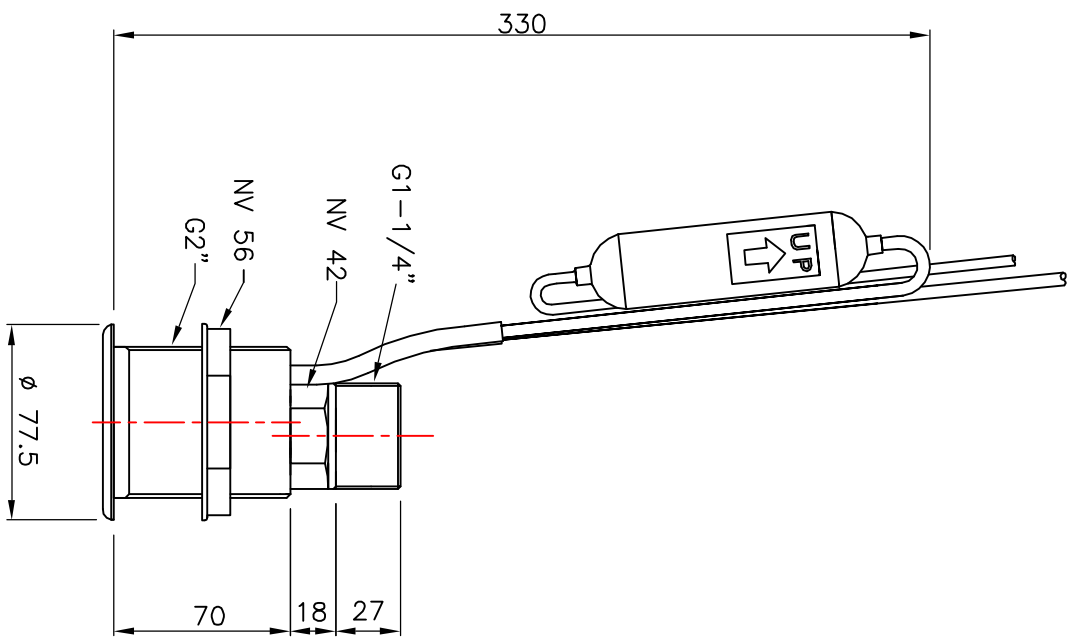

Isotherm SP through hull fitting

Revised	Revision	note	Date	Signature	Checked																									
<table border="1"> <tr> <td>Designd</td> <td>Quantity</td> <td colspan="2">Title/Name, designation, material, dimension etc</td> <td>Article No./Reference</td> </tr> <tr> <td>Designed by</td> <td>Checked by</td> <td>Approved by - date</td> <td>Released by</td> <td>Date</td> </tr> <tr> <td colspan="3"> Designer Thermoprodukter AB Kalmar </td> <td colspan="2"> Title/Name SP bordgenomföring Drawing number 000397 </td> </tr> <tr> <td colspan="3"></td> <td>Edition</td> <td>Scale</td> </tr> <tr> <td colspan="3"></td> <td>2</td> <td></td> </tr> </table>						Designd	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference	Designed by	Checked by	Approved by - date	Released by	Date	Designer Thermoprodukter AB Kalmar			Title/Name SP bordgenomföring Drawing number 000397					Edition	Scale				2	
Designd	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference																										
Designed by	Checked by	Approved by - date	Released by	Date																										
Designer Thermoprodukter AB Kalmar			Title/Name SP bordgenomföring Drawing number 000397																											
			Edition	Scale																										
			2																											