


- Cut hole as per template. use 4 screws supplied to retain panel.
 - * CSK Screws in two left hand holes. (Fit supplied grommets into screw holes to hide screw heads.)
 - * Pan head screws in two right hand holes. (Fit supplied grommets into screw holes to hide screw heads.)
- Connect Negative from battery to negative stud (not supplied) or buss bar (not supplied). connect negative from panel to negative stud.
- Connect fused positive feed to switch inputs (bare switch terminals i.e. no LED wire connection).
- Connect backlight wire to any switch (Navigation light switch recommended) make sure to connect the wire to the LED wire side of the switch
- Connect positive from appliance to switched side of switch (switch terminals with LED wires).
- Fit negative from appliance to negative stud.



- Cut hole as per template. use 4 screws supplied to retain panel.
 - * CSK Screws in two left hand holes. (Fit supplied grommets into screw holes to hide screw heads.)
 - * Pan head screws in two right hand holes. (Fit supplied grommets into screw holes to hide screw heads.)
- Connect Negative from battery to negative stud (not supplied) or buss bar (not supplied). connect negative from panel to negative stud.
- Connect fused positive feed to switch inputs (bare switch terminals i.e. no LED wire connection).
- Connect backlight wire to any switch (Navigation light switch recommended) make sure to connect the wire to the LED wire side of the switch
- Connect positive from appliance to switched side of switch (switch terminals with LED wires).
- Fit negative from appliance to negative stud.

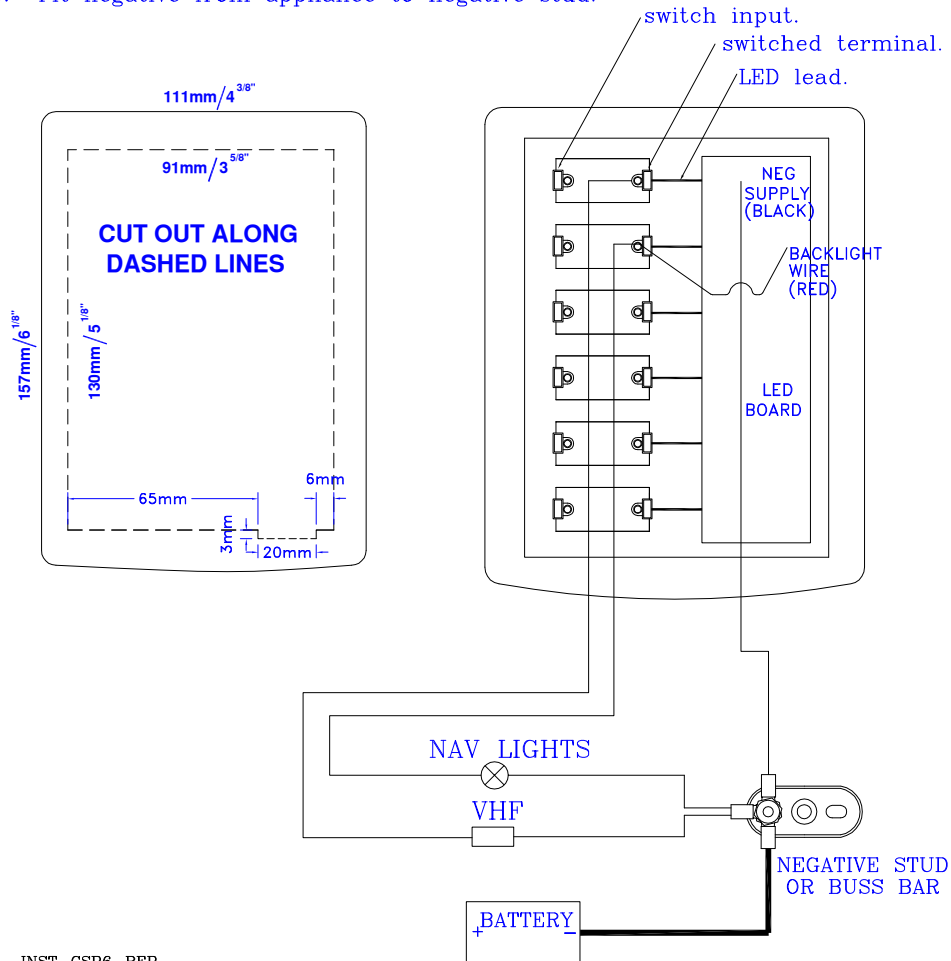